


PICMG 2.0R3.0

Key Features:

- ◆ Conform to PICMG2.0 R3.0
- ◆ Supports Hot Swap feature of PICMG 2.1 R2.0
- ◆ Conform to PICMG 2.9 R1.0
- ◆ V/I/O are user selectable to a +5V or +3.3V
- ◆ All signal line characteristic impedance are set to 65Ω
- ◆ FR4 material PCB
- ◆ 2 m/m HM connector

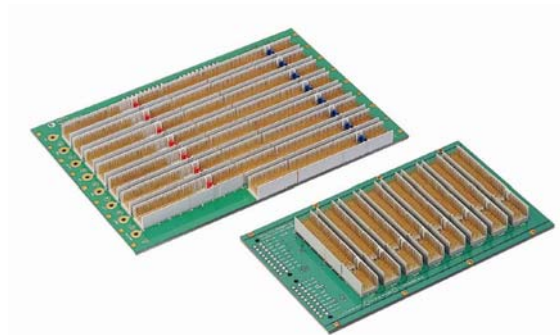

U	Slots	MHz	Bit	System Slot	P/N
3	4	33/66	32	Right	CPCI2034VRR_32-A1
3	6	33/66	32/64	Left	PHT00-20030-06
3	6	33/66	32	Right	CPCI20R30-3U6SVR_32-A1
3	6	33/66	32	Right	CPCI20R30-3U6SVR_32-A1A
3	8	33/66	32/64	Left	PHT00-20030-08
3	8	33/66	32	Left	CPCI2038VLR_32-A1
3	16	33/66	32	Left	BP-316
3	18	33/66	32	Left	BP-318
6	4	33/66	32	Bottom	CPCI20-64HBR_32-A1
6	4	66	64	Bottom	CPCI20-64HLB-A1
6	8	33/66	32/64	Left	CPCI20-68VLR-A1
6	8	33/66	32/64	Bottom	CPCI20U6S8HL-A1
6	10	33/66	32/64	Left	CPCI20-610VLR-A1
9	4	33/66	32/64	Bottom	CPCI20-64HL_2PS-A1
9	4	33/66	32/64	Bottom	CPCI216-64HL_2PS-A1

Customized backplanes are welcome and available.

For more details and user manuals, please contact us at : mapsuka@mapsuka.com.tw